

DUO SPOT STEEL & ALU – 2-IN-1 ENTRÉE

DUO SPOT

with spot torch/earth + CD STUD TORCH/earth,
Input current 1PH/220V

REF NO: CEL.11244-G-01

SLIDE LEVER 600
WITH HOOK - 1

TECHNICAL SPEC	DUO SPOT
MAX WELDING CURRENT:	8000A
DUTY CYCLE:	10 M4 AL STUDS/MIN @ 80%
VOLTAGE/PHASE:	220V 1PH 60/50HZ
MAX INPUT CURRENT:	8A
WEIGHT:	23KG




430 X 220 X 310(H)MM



550 X 430 X 470(H)MM

REF NO: CEL.ET19-11244-2

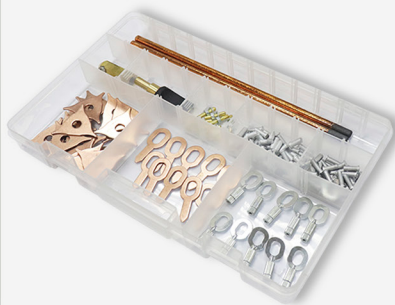

TRIANGLE HOLDER - 1



BIG TRIANGLE
WASHER - 20



CARBON ROD - 2



M5 TIP - 10



ELECTRODE
FOR TAB - 1



TAB STRAIGHT - 10



STUD SCREW - ALU
M6*15 AL-MG-SI

STUD SCREW - ALU
M6*15 AL-MG



360° M6 PULLER - 10



OPTIONAL




H PULLER WITH
M5 TIP



SMALL TRIANGLE
WASHER



ELECTRODE



STAR WASHER




HOOK PULLER
SLIDE HAMMER




SLIDE SNAP 300
WITH 4 HOOKS CLAW



STUD SCREW
M4*15
AL-MG-SI



STUD SCREW
M4*15
AL-MG



360° M4 PULLER

